



ARK-NGB 1375 N5

Powered by  **Baudouin**

16M33

PowerKit Natural Gas Engine

-  WATER COOLED
-  3 PHASE
-  50 HZ
-  DIESEL



GENERAL CHARACTERISTICS



		Continuous ¹	Prime ²	Standby ³
Power	kVA / kW	1375 / 1100	N/A	N/A
Speed	r.p.m	1500 dev/dk		
Standard Voltage	V	400/230VAC		
Power Factor	Cos Phi	0,8		

¹ **Continuous Power (COP)**

Continuous operating power under constant load. The average load value can be 100%. It cannot be overloaded.

² **Prime Power (PRP)**

It is a form of operation under variable load as a constant power supply. The average load must be 70% 10% overload every 12 hours is permitted when operating under variable load for 24 hours.

³ **Standby Power (ESP)**

A variable-load limited-time behavior in the event of a loss of a reliable mains supply. It is used as a backup to the network energy and overloading is not allowed.

Arken Generator holds following certificates: ISO 9001:2015, CE, TS ISO8528-5, TS ISO 8528-13, TS ISO 8528-4, ISO 10002:2014, ISO 14001:2015, ISO 45001:2018, Noise Directive 2000/14/EC G3 class ISO 8528-5/15.10.2015 ISO 8528-13/13.04.2018

Arken Generator products are manufactured according to following EEC standards:

Machinery Directive	2006/42/EC
	EN ISO 12100:2016
Low Voltage Directive	2014/35/EU
Noise Directive	2000/14/EC
Controlgear & Switchgear	TS ISO 8528-4 :2015
Generating Sets	TS ISO 8528-5 :2015
Safety	TS EN 12601 :2013




Engine Technical Data 1500 r.p.m.

Brand:	BAUDOUIIN
Power PRP [kW]:	1280
Model:	16M33G6N0/5
N° of Cylinders / Valves:	16/64
Engine Type:	4
Displacement [lt] :	52,3
Hava Emiř Sistemi :	Turbocharger Intercooler
Bore x Stroke [mm] :	150x185
Compression Ratio:	12.5:1
Air Filter:	Heavy Duty
Cooling Method:	Water Cooled (water + %50 antifreeze)
Total Coolant Capacity (Lt):	542
Governor Type :	ECU
Electrical System:	24VDC
Charging Alternator Current:	55
Oil Capacity [lt] :	171
Exhaust Gas Flow PRP [m3/min] :	272,3
Maximum Exhaust Gas Outlet Temperature [°C] :	≤502
Combustion Air Flow PRP [m3/min] :	84,9
Cooling Air Flow PRP [m3/min] :	N/A
Starter Power (kW) :	8,5
Standard Battery Voltage VDC :	24VDC
Standard Battery Capacity :	4x150Ah
Standard Battery Type :	Maintenance-Free Lead Acid

Fuel consumption / Mechanical efficiency ISO3046/1

	Continuous			Prime	Standby
	100%	75%	50%	100%	100%
Fuel Consumption LHV - (KW)	3056	2387	1675	N/A	N/A
Motor mechanical efficiency (%)	41,88	40,22	38,21	N/A	N/A
Motor thermal efficiency (%)	42	46	50	N/A	N/A

Fuel consumption tolerance +/- %5

Values Assumed to be Pipeline Natural Gas - MN ≥ 80.

Alternator Data

Brand:	NEKRA
Model :	ARK 7F
Voltage :	400 /230 VAC
Number of Phase :	3
Power Factor:	0,8
Number of Poles:	4
Connection Type:	Star
Bearing:	Single Bed
Insulation Class:	H
Protection Class:	IP23
Winding:	2/3
Control System :	Self-Warned
Voltage Regulator :	Electronic AVR
Efficiency 4/4 400VAC 50Hz (cosφ=1) :	96,8
Voltage Regulation :	±%1
THD:	<%5
Apparent Power [kVA] Prime 400VAC 50Hz 125°C/40°C	1500






Control Panel



ISO8528-4
IP44
Trans-AMF Control Unit
DSE Control Unit (Optional)
Emergency Stop Button
Battery Charger 5Amp
Governor
Connection Bus (Under Panel)
Control Relays
Thermal & Magnetic Protection (Optional)

Control Device Specifications

- IP65 Front Panel
- Automatic/Manual/Test operation modes
- CanBus J1939 ECU
- 2nd Language Selection
- Last 500 incident and alarm information record
- Statistical Record
- Grid and Generator phase order control
- Grid Voltage Control
- RS-485 Communication
- GPRS - Ethernet connection (Optional)
- Automatic transfer switching control and motor control




Dimensions & Weights

	L [mm] Length	W [mm] Widht	H [mm] Height	Dry Weight [kg]	Sound Level dBA@7mt
Open Type	5689	2215	2649	TBA	n/a



	L [mm] Length	W [mm] Widht	H [mm] Height	Dry Weight [kg]	Sound Level dBA@7mt
Canopy Type	8360	2560	3242	TBA	Uygulanmıyor

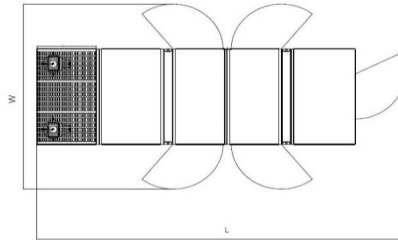

Door Widths

W [mm] Widht
4260



ENGINE

Arken Generator provides industrial engines that meet ISO 8528, ISO 3046 specifications; heavy duty type; oil, air or water-cooled depending on the requirements; low fuel consumption; with mechanical and/or electronical type of governor mounted on fuel pump to ensure precise speed adjustment and regulation; with oil, fuel and air filter system based on type; oil and fuel designed for heavy operational conditions in order to make sure the unit lasts a long time with high performance; 4-stroke; direct injection with all the limit and level sensors required for protection. The engine is supplied with all the necessary equipment for safe operation. Only engines designed for standby are not included in the production portfolio.

ALTERNATOR

Arken Generator uses original European brand alternators for its gensets, that complies with all international certificates, IEC 60034-1, ISO8258-3, EN55011, BS4999-5000 VDE 0530, depending on their power and requirements. The alternators, that has high efficiency and high performance for all conditions, have all the quality certificates and comply with world standards.

COOLING SYSTEM

In order to meet variations such as availability, ease of spare parts, high performance and maximum efficiency, Arken Generator selects its radiators from the original radiators of the engine company in the generator set or applies the radiators approved by the engine company to the generator sets.

FRAME

Arken Generator manufactures its own chassis for all generator sets based on international standards. The chassis are designed and manufactured from plate sheet or profile content to show high resistance to vibration and stresses.

FUEL SYSTEM

Pressure loss from gas mixer (mBar): 5
Maximum suction pressure (mBar): 30
Max. Gas inlet temperature (°C) :35
Min/Max customer supply pressure before gas regulator (Bar): 0,02 / 0,04
Min/Max supply pressure at motor inlet (mBar): 15 / 35
Min. diameter of gas inlet pipe (mm): 24

CANOPY

To provide sound insulation (ISO8528-10:1998) and to protect the generator from the corrosive effects of external weather conditions, cabins or containers are used depending on the size of the generator or the degree of sound intensity. Although the priority when designing the cabinets is aimed only at the sound level, in addition to the conditions specified by ISO3046 and ISO8528 standards, the generator is designed to provide the declared power in tropical climate and 50°C ambient temperature, 30% relative humidity value and sea level. The cabins have features such as compact structure, low height, low noise level, easy access to the engine-alternator and control panel, two-point lifting, exhaust silencer hidden inside the cabin for safety and corrosion prevention, and the ability to be disassembled.

DOCUMENTATION

Arken Generator Maintenance and user manual, Engine Operation and maintenance manual, Operation and maintenance manual, Control device Operation and maintenance manual, Warranty card, Electrical diagram

WARRANTY

The warranty period starts from the date of receipt of the goods, 1 Years or 1000 hours.